



YC9 series

直式护套插头 Straight sheath plug

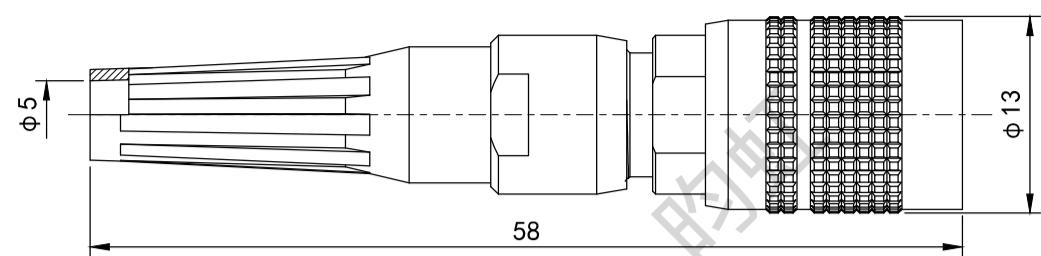

接触件可以是插针或插孔
Each side can be male or female contact


对接护套插座 Docking sheath round receptacle

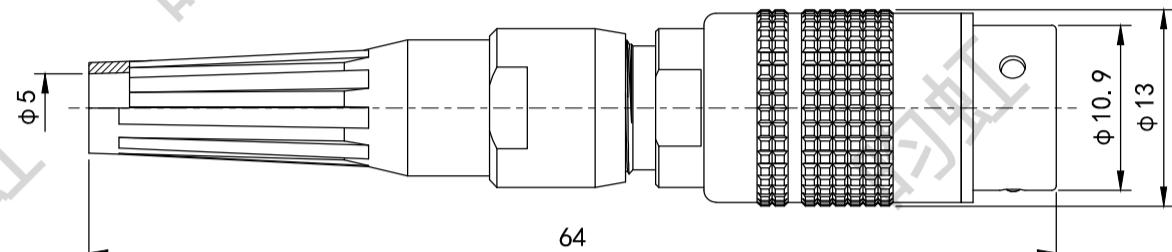

接触件可以是插针或插孔
Each side can be male or female contact

后螺母圆形插座


Rear nut round receptacle

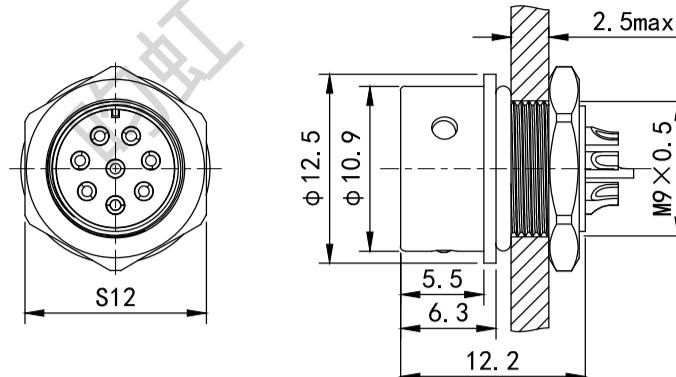

接触件可以是插针或插孔
Each side can be male or female contact

后螺母圆形插座 (PCB款)

Rear nut round receptacle (PCB款)

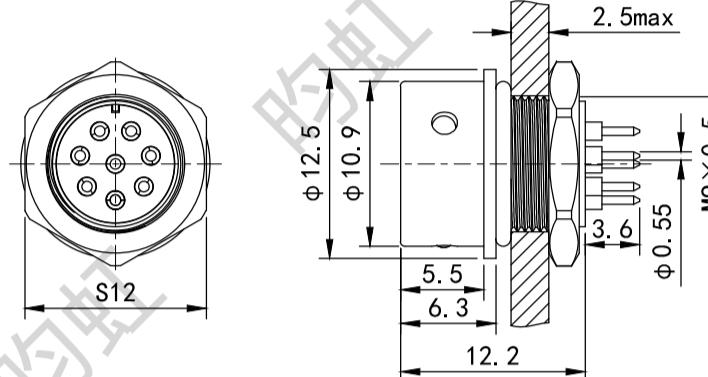

接触件可以是插针或插孔
Each side can be male or female contact

材料和技术参数 Material and spec

接插方式 Coupling	推入式快速锁紧 Push-pull
外壳材料 Shell material	黄铜（镀铬） Brass with chrome plating
绝缘体 Insert material	塑料pps，耐高温260°C PPS, max temperature 260°C
接触件材料 Contact material	铜（镀金） Brass with gold plating
接线方式 Termination	焊接 Solder
插拔次数 Mating cycle	500
温度范围 Temperature range	-30°C ~ +85°C
防水等级 IP waterproof grade	IP65

焊接芯件参数表 Solder contact spec

芯数 Number of contact	8		
公端绝缘体正面图 Male contact face view			
额定电流 (A) Rated current(A)	3		
接触件直径 (mm) Contact diameter(mm)	Φ0.6×8		
工作电压 (AC.V) Rated voltage(AC.V)	50		
耐压 (AC.V) 1 min Test voltage (AC.V) 1 min	500		
接触电阻 (mΩ) Contact resistance(mΩ)	10		
绝缘电阻 (MΩ) Insulation resistance(MΩ)	2000		
焊杯孔径 (mm) Welding cup aperture (mm)	Φ0.6		