



XS16 series

PG9直式插头 Straight PG9 plug

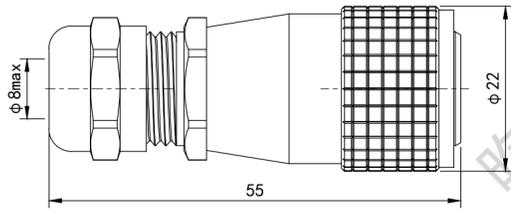


接触件可以是插针或插孔
Each side can be male or female contact

PG13.5直式插头 Straight PG13.5 plug

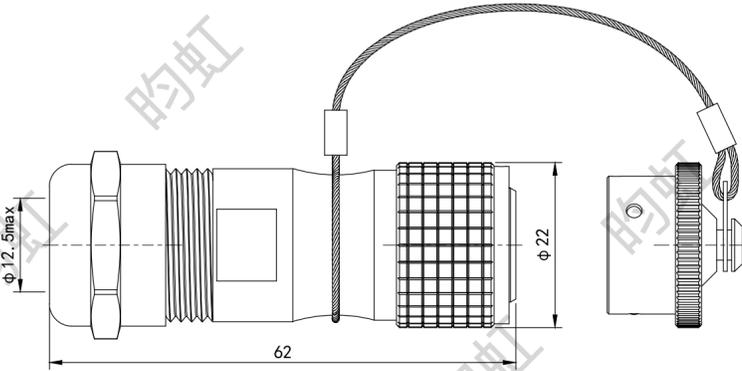


接触件可以是插针或插孔/金属防尘盖可选购
Each side can be male or female contact /
Purchase of metal dust cover

PG9对接插座 Docking PG9 round receptacle

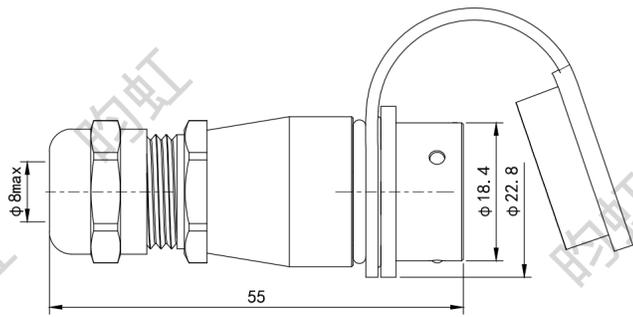


接触件可以是插针或插孔
Each side can be male or female contact

PG13.5对接插座 Docking PG13.5 round receptacle

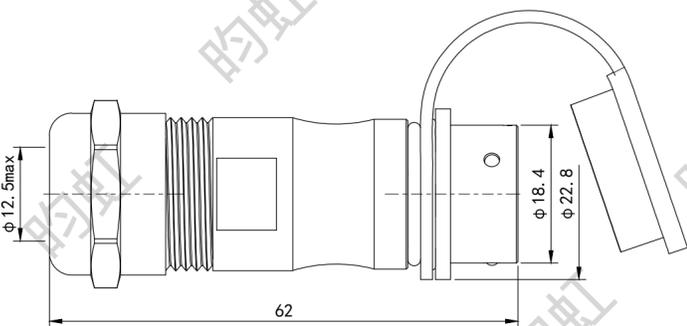


接触件可以是插针或插孔
Each side can be male or female contact

后螺母圆形插座 Rear nut round receptacle

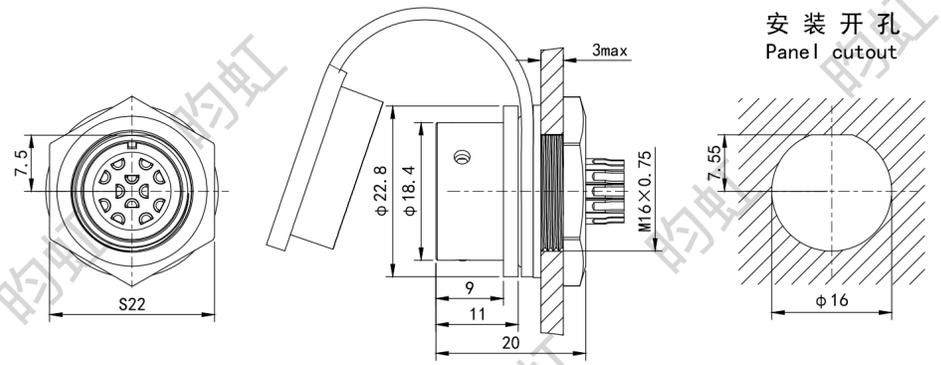

接触件可以是插针或插孔/选购金属或塑料防尘盖
Each side can be male or female contact /
Optional metal or plastic dust cover

前螺母双切面圆形插座 Front nut double cut round receptacle

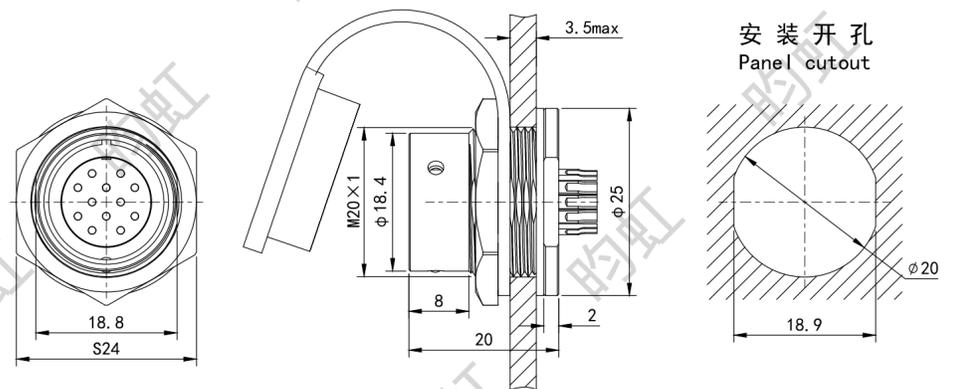

接触件可以是插针或插孔
Each side can be male or female contact

材料和技术参数 Material and spec

接插方式 Coupling	推入式快速锁紧 Push-pull
外壳材料 Shell material	黄铜(镀铬) Brass with chrome plating
绝缘体 Insert material	塑料pbt, 耐高温180℃ PBT, max temperature 180℃
接触件材料 Contact material	铜(镀金) Brass with gold plating
接线方式 Termination	焊接 Solder
插拔次数 Mating cycle	500
温度范围 Temperature range	-30℃~+85℃
防水等级 IP waterproof grade	IP67

焊接芯件参数表 Solder contact spec

芯数 Number of contact	9	12		
公端绝缘体正面图 Male contact face view				
额定电流(A) Rated current(A)	5	5		
接触件直径(mm) Contact diameter(mm)	φ1×9	φ1×12		
工作电压(AC.V) Rated voltage(AC.V)	400	400		
耐压(AC.V) 1 min Test voltage (AC.V) 1 min	1200	1200		
接触电阻(mΩ) Contact resistance(mΩ)	5	5		
绝缘电阻(MΩ) Insulation resistance(MΩ)	2000	2000		
焊杯孔径(mm) Welding cup aperture (mm)	φ1.2	φ1.2		