



直式插头 Straight plug

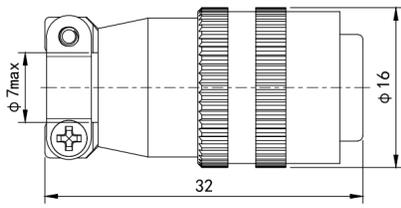


接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

后螺母圆形插座 Rear nut round receptacle

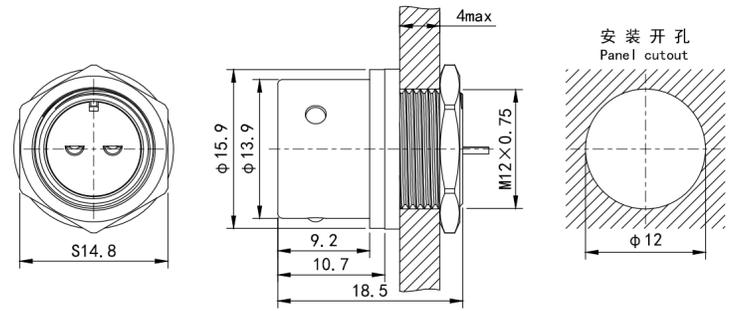


接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

直式螺纹插头 Straight thread plug

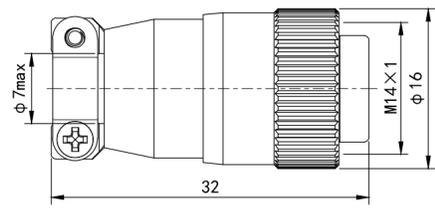


接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

后螺母双切面圆形插座 Rear nut double cut round receptacle

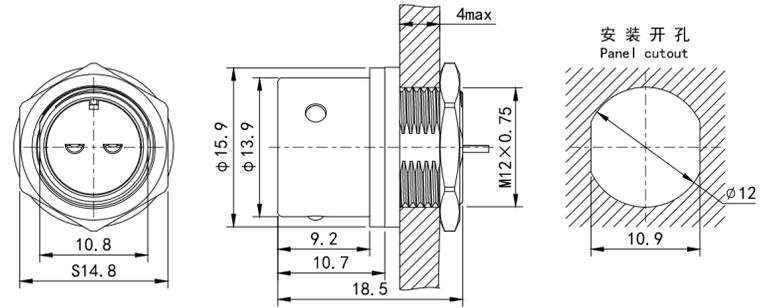


接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

直式护套插头 Straight sheath plug

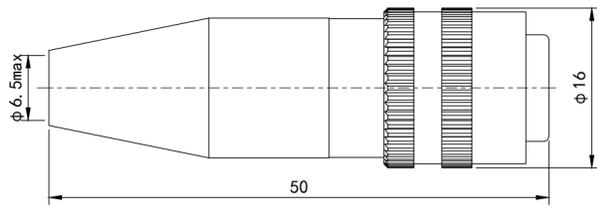


接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

方形法兰插座 Square flange mount receptacle

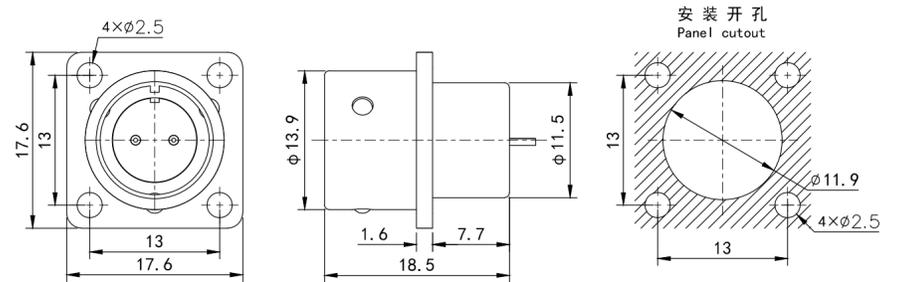


接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

直式护套螺纹插头 Straight sheath thread plug

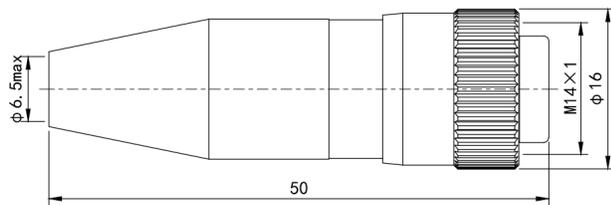


接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

后螺母圆形螺纹插座 Rear nut round thread receptacle

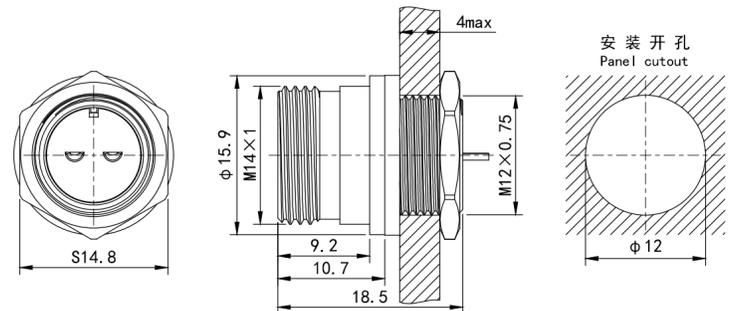


接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

对接插座 Docking round receptacle

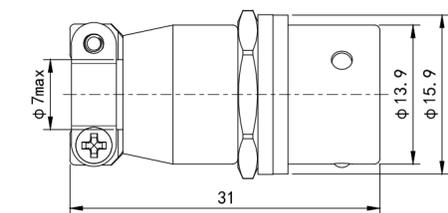


接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

后螺母双切面圆形螺纹插座
Rear nut double cut round thread receptacle

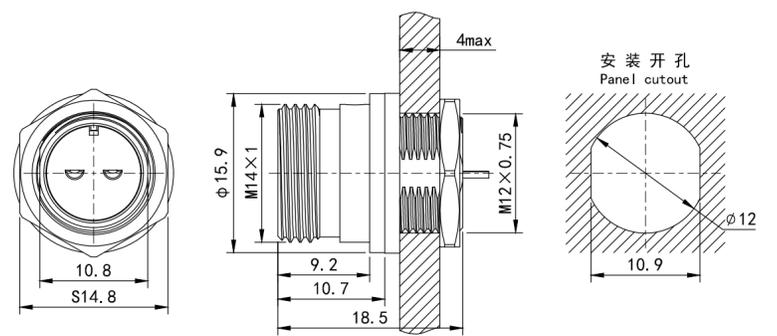


接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

对接螺纹插座 Docking round thread receptacle

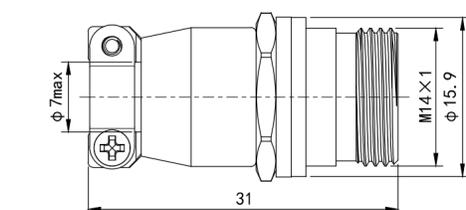

接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

方形法兰螺纹插座 Square flange mount thread receptacle

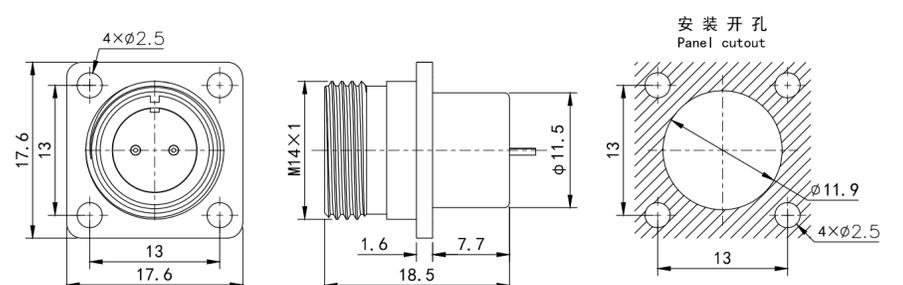






接触件可以是插针或插孔/可订购为车针或车孔
Each side can be male or female contact/ Customizable as needle or hole

XS12 series

材料和技术参数 Material and spec

接插方式 Coupling	推入式快速锁紧; 螺纹连接 Push-pull; Threaded
外壳材料 Shell material	黄铜; 锌合金 (镀镍) Brass or kirsite with nickel plated
绝缘体 Insert material	塑料pbt, 耐高温180℃ PBT,max temperature 180℃
接触件材料 Contact material	插孔锡青铜; 铜 (镀金, 镀银) Brass plated with gold or silver
接线方式 Termination	焊接 Solder
插拔次数 Mating cycle	500
温度范围 Temperature range	-30℃~+85℃
防水等级 IP waterproof grade	IP65

焊接芯件参数表 Solder contact spec

芯数 Number of contact	2	2B	3	4	4B	5	7
公端绝缘体正面图 Male contact face view							
额定电流 (A) Rated current(A)	5	5	5	5	5	5	5
接触件直径 (mm) Contact diameter(mm)	φ1×2	φ1×2	φ1×3	φ1×4	φ1×4	φ1×5	φ1×7
工作电压 (AC.V) Rated voltage(AC.V)	200	200	200	200	200	180	180
耐压 (AC.V) 1 min Test voltage (AC.V)1 min	1000	1000	1000	1000	1000	1000	1000
接触电阻 (mΩ) Contact resistance(mΩ)	5	5	5	5	5	5	5
绝缘电阻 (MΩ) Insulation resistance(MΩ)	2000	2000	2000	2000	2000	2000	2000
焊杯孔径 (mm) Welding cup aperture (mm)	φ1	φ1	φ1	φ1	φ1	φ1	φ1