



XS7 series

直式插头 Straight plug

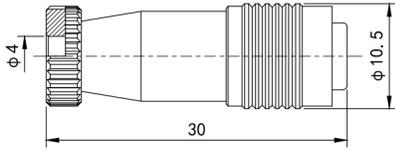


接触件可以是插针或插孔
Each side can be male or female contact

弯式插头 Elbow plug

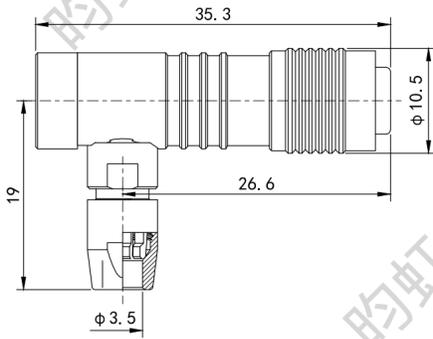


接触件可以是插针或插孔
Each side can be male or female contact

后螺母圆形插座/与YC7相配 Rear nut round receptacle/Mate with YC7

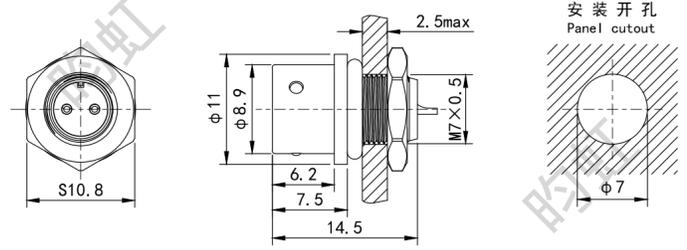


接触件可以是插针或插孔
Each side can be male or female contact

方形法兰插座/与YC7相配 Square flange receptacle/Mate with YC7

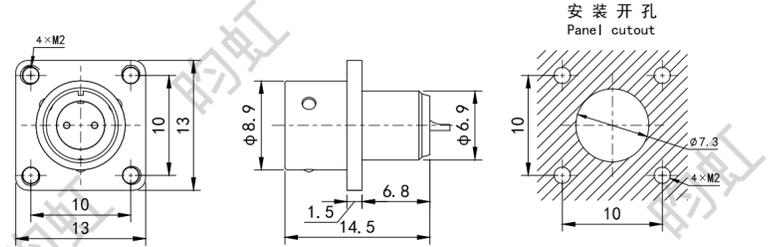

接触件可以是插针或插孔
Each side can be male or female contact

前螺母双切面圆形插座/与YC7相配 Front nut double cut round receptacle/Mate with YC7

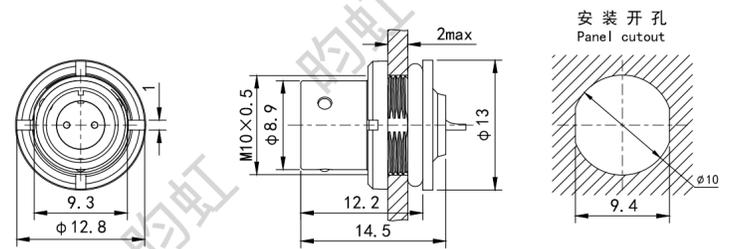

接触件可以是插针或插孔
Each side can be male or female contact

材料和技术参数 Material and spec

接插方式 Coupling	推入式快速锁紧 Push-pull
外壳材料 Shell material	黄铜（镀铬） Brass with chrome plating
绝缘体 Insert material	塑料pps, 耐高温260℃ PPS, max temperature 260℃
接触件材料 Contact material	铜（镀金） Brass with gold plating
接线方式 Termination	焊接 Solder
插拔次数 Mating cycle	500
温度范围 Temperature range	-30℃~+85℃
防水等级 IP waterproof grade	IP65

焊接芯件参数表 Solder contact spec

芯数 Number of contact	2	3	4	5
公端绝缘体正面图 Male contact face view				
额定电流 (A) Rated current (A)	3	3	3	3
接触件直径 (mm) Contact diameter (mm)	φ 0.6×2	φ 0.6×3	φ 0.6×4	φ 0.6×5
工作电压 (AC.V) Rated voltage (AC.V)	50	50	50	50
耐压 (AC.V) 1 min Test voltage (AC.V) 1 min	500	500	500	500
接触电阻 (mΩ) Contact resistance (mΩ)	10	10	10	10
绝缘电阻 (MΩ) Insulation resistance (MΩ)	2000	2000	2000	2000
焊杯孔径 (mm) Welding cup aperture (mm)	φ 0.6	φ 0.6	φ 0.6	φ 0.6