



DDK series

直式插头 Straight plug

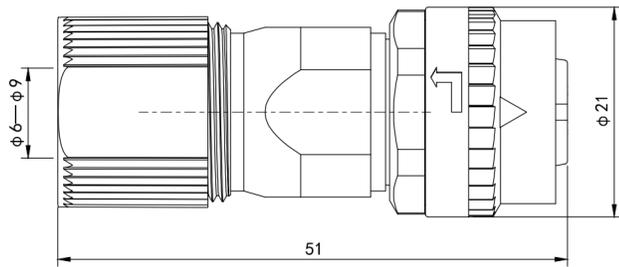


橡胶防尘盖需另购
Rubber dust cover to be purchased separately

弯式插头 Curved plug

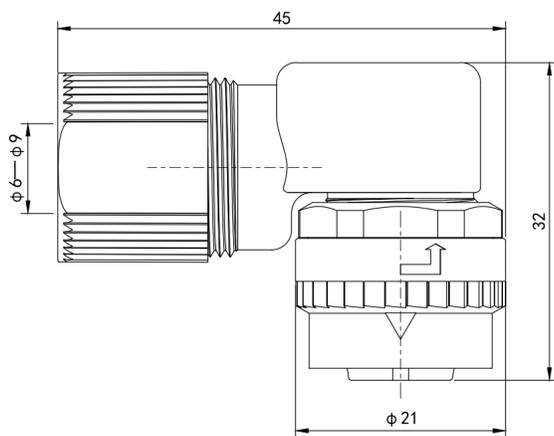


橡胶防尘盖需另购
Rubber dust cover to be purchased separately

薄口型方形法兰插座 Thin type square flange receptacle

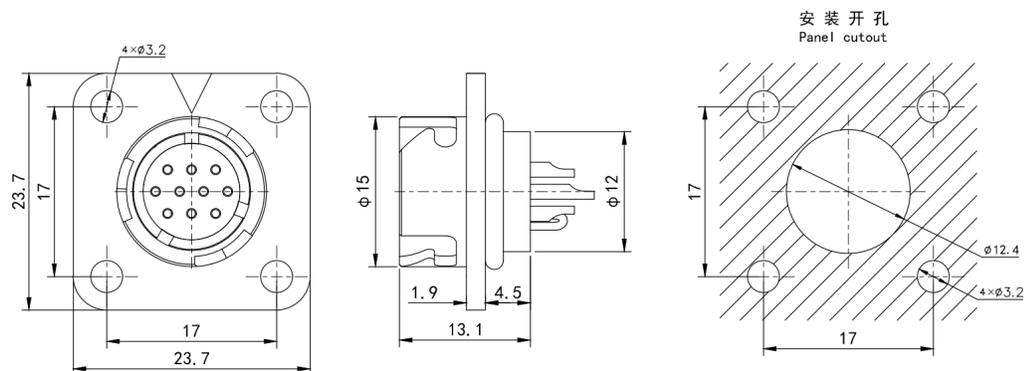

橡胶防尘盖需另购
Rubber dust cover to be purchased separately

厚口型方形法兰插座 thick type square flange receptacle

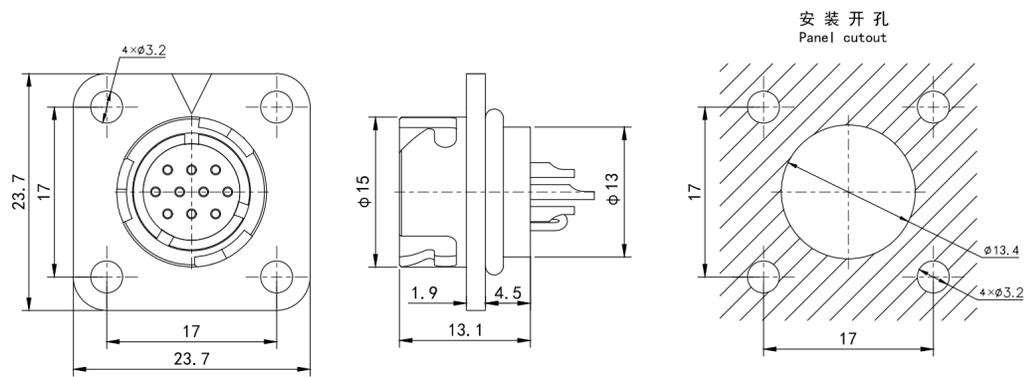

橡胶防尘盖需另购
Rubber dust cover to be purchased separately

材料和技术参数 Material and spec

接插方式 Coupling	推入式卡扣锁紧 Snap lock
外壳材料 Shell material	锌合金（镀镍） Zinc alloy with nickel plated
绝缘体 Insert material	塑料pps, 耐高温260℃ PBT, max temperature 260℃
接触件材料 Contact material	插孔锡青铜; 铜（镀金） Brass with gold plating
接线方式 Termination	焊接 Solder
插拔次数 Mating cycle	500
温度范围 Temperature range	-30℃~+85℃
防水等级 IP waterproof grade	IP67

焊接芯件参数表 Solder contact spec

芯数 Number of contact	2	3	7	10		
公端绝缘体正面图 Male contact face view						
额定电流 (A) Rated current (A)	4	4	4	4		
接触件直径 (mm) Contact diameter (mm)	φ 0.75×2	φ 0.75×3	φ 0.75×7	φ 0.75×10		
工作电压 (AC.V) Rated voltage (AC.V)	200	200	200	200		
耐压 (AC.V) 1 min Test voltage (AC.V) 1 min	1500	1500	1500	1200		
接触电阻 (mΩ) Contact resistance (mΩ)	10	10	10	10		
绝缘电阻 (MΩ) Insulation resistance (MΩ)	2000	2000	2000	2000		
焊杯孔径 (mm) Welding cup aperture (mm)	φ 0.9	φ 0.9	φ 0.9	φ 0.9		