



GX16 series

直式插头 Straight plug

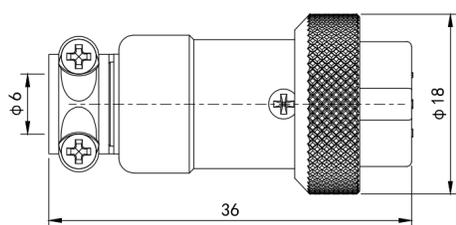


绝缘体可选购螺纹连接
Insulator selection threaded connection


弯式插头 Curved plug

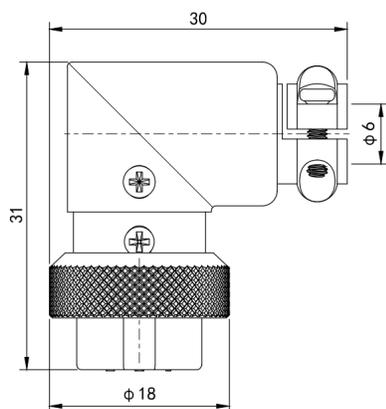

对接插座 Docking round receptacle

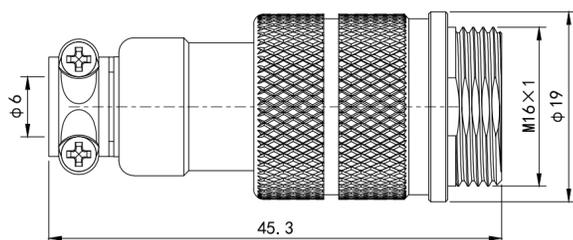


后螺母圆形插座 Rear nut round receptacle

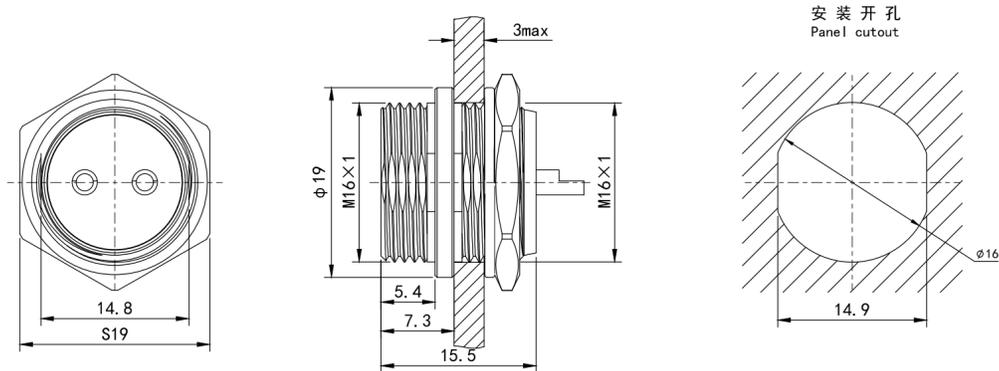


接触件可选购PCB插板式圆头针
Contact parts purchase PCB insert plate round head pin

前螺母单切面圆形插座 Front nut single cut round receptacle

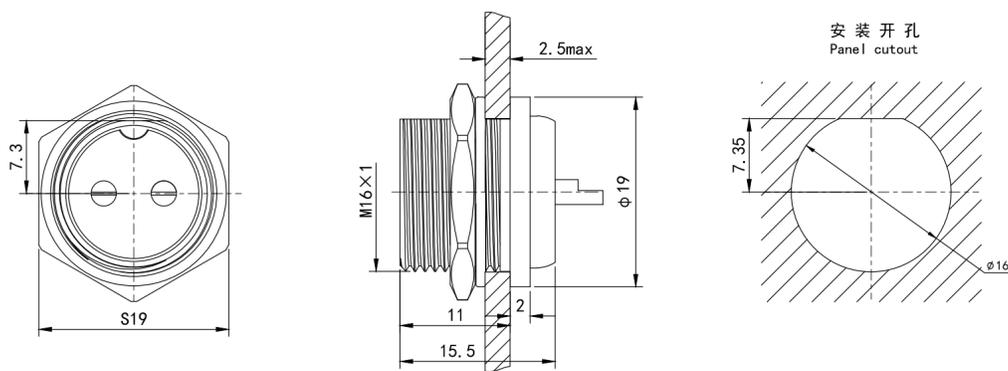


接触件可选购PCB插板式圆头针
Contact parts purchase PCB insert plate round head pin

方形法兰插座 Square flange receptacle

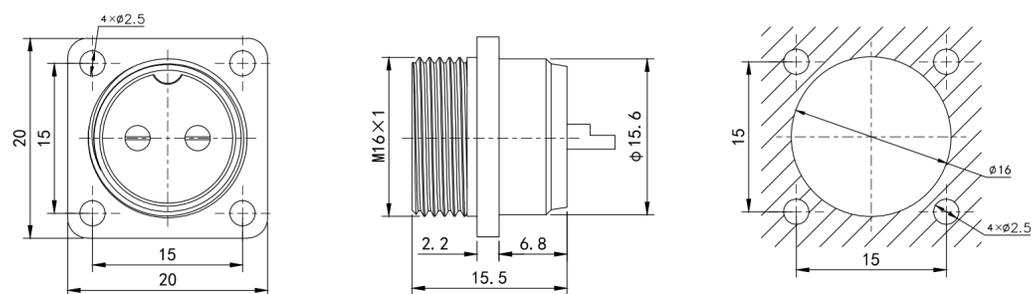

接触件可选购PCB插板式圆头针
Contact parts purchase PCB insert plate round head pin


菱形法兰插座 Diamond flange receptacle

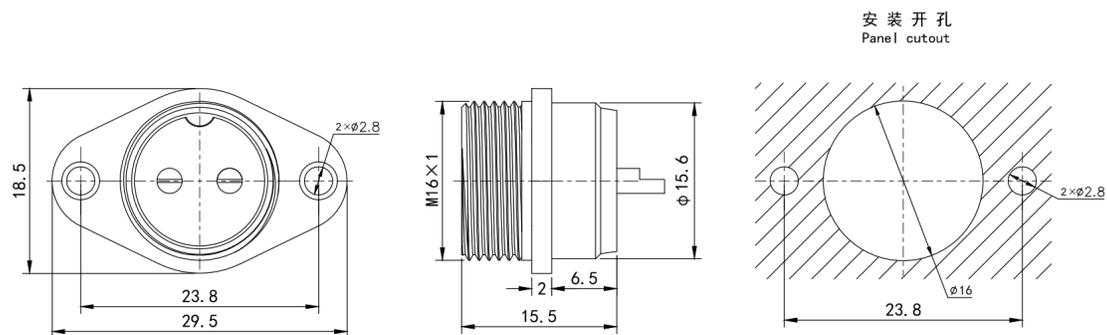

接触件可选购PCB插板式圆头针
Contact parts purchase PCB insert plate round head pin




GX16 series

橡胶防尘盖 Rubber dust cover

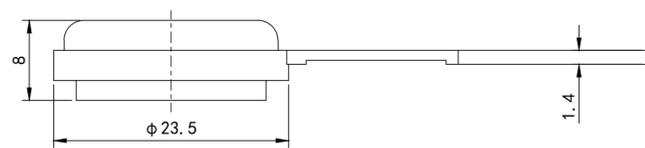


另购
Purchase

圆形法兰插座 Round flange receptacle

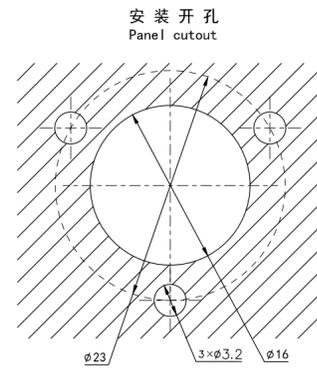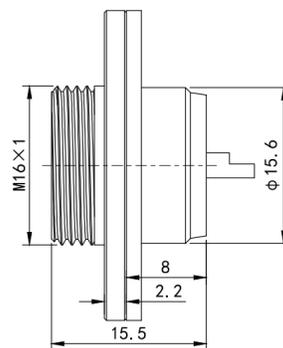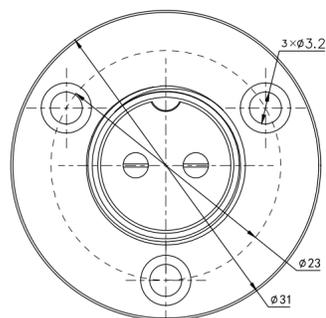

金属防尘盖 Metal dust cover

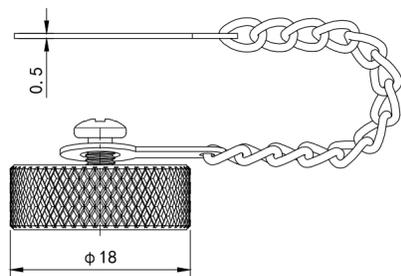

另购
Purchase

接触件可选购PCB插板式圆头针
Contact parts purchase PCB insert plate round head pin

材料和技术参数 Material and spec

接插方式 Coupling	螺纹连接 Threaded
外壳材料 Shell material	黄铜; 锌合金(镀镍) Brass or kirsite with nickel plated
绝缘体 Insert material	酚醛树脂/塑料PBT, 耐高温180℃ Phenolics/PBT, max temperature 180℃
接触件材料 Contact material	铜(镀金/银) Brass plated with gold and silver
接线方式 Termination	焊接 Solder
插拔次数 Mating cycle	500
温度范围 Temperature range	-30℃~+85℃
防水等级 IP waterproof grade	IP65

焊接芯件参数表 Solder contact spec

芯数 Number of contact	2	3	4	5	6	7	8	9	10
公端绝缘体背面图 Opposite contact face view									
额定电流(A) Rated current(A)	25	25	25	15	7	7	7	7	7
接触件直径(mm) Contact diameter(mm)	φ2.5×2	φ2.5×3	φ2.5×4	φ2×5	φ1.2×6	φ1.2×7	φ1.2×8	φ1.2×9	φ1.2×10
工作电压(AC.V) Rated voltage(AC.V)	500	500	500	500	400	400	400	400	400
耐压(AC.V) 1 min Test voltage (AC.V) 1 min	1500	1500	1500	1500	1200	1200	1200	1000	1000
接触电阻(mΩ) Contact resistance(mΩ)	1	1	1	2.5	5	5	5	5	5
绝缘电阻(MΩ) Insulation resistance(MΩ)	2000	2000	2000	2000	2000	2000	2000	2000	2000
焊杯孔径(mm) Welding cup aperture (mm)	φ1.7	φ1.7	φ1.7	φ1.2	φ0.9	φ0.9	φ0.9	φ0.9	φ0.9